


JAD-6234 3/8" AIR REVERSIBLE DRILL

CE

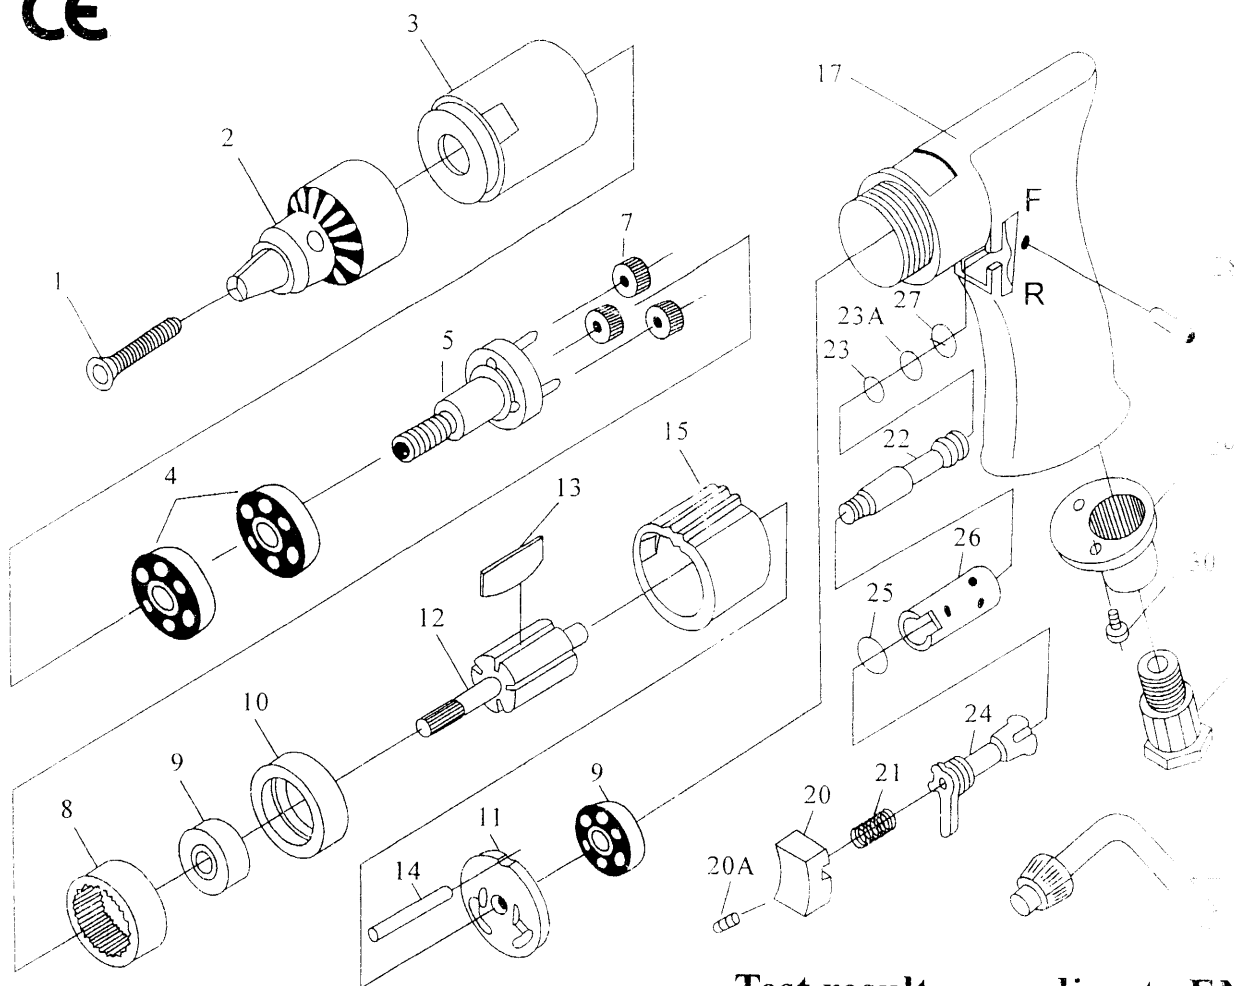

Test result according to EN792-3

IMPORTANT! READ CAREFULLY BEFORE OPERATING THIS TOOL. FAILURE TO OPERATE ANY POWER TOOL PROPERLY CAN RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE.

SPECIFICATIONS :
(3/8" REVERSIBLE AIR DRILL)

Chuck Size..... 3/8"
 Speed(RPM)..... 1800
 Spindle Threa..... 3/8"-24
 Overall Length..... 7-1/2"
 Net Weight..... 3lbs
 Average Air Consumption..... 4 CFM

Vibration	Noise	Remark
EN 28662-1	ISO 3745:1995(E)	
Load: 0.2m/s ²	Sound pressure level	Should wear an approved ear protector and gloves while operating tool
	92.0dB	
	Sound power level	
	102.5dB	
	Instantaneous sound pressure	
	108.0 dB	

Index No.	Ref.No.	Description	Q'ty
1	SS-5020B	Screw (M5x20)	1
2	305002	Drill Chuck (3/8")	1
3	305003	Gear Housing	1
5	BB-62012	Ball Bearing (6201ZZ)	2
6	305006	Planet Carrier	1
6A	NR-40148	Needle Roller (φ 4x14.8)	3
7	305007	Planet Gear	3
8	302021	Internal Gear	1
9	BB-06262	Ball Bearing (626zz)	2
10	305010	Bearing Case	1
11	305011	End Plate	1

Index No.	Ref.No.	Description	Q'ty
12	305012	Rotor	1
13	302025	Rotor Blade	5
14	305014	Motor Pin (φ 2x55)	1
15	305015	Cylinder	1
17	305017	Motor Housing	1
20	305020	Trigger	1
20A	SS-0406A	Set Screw (M4x6)	1
21	305021	Valve Spring	1
22	305022	Throttle Valve	1
23	ORP-0035	"O" Ring (φ 1.5x1.5)	1
23A	317005	"O" Ring (3.9x2.25x2)	

Index No.	Ref.No.	Description	Q'ty
24	305024	Reverse Valve	
25	ORP-0090	"O" Ring (P9)	
26	305026	Reverse Valve Bush	
27	ORP-0140	"O" Ring (P14)	
28	SP-25220	Pin (M2.5x22)	
29	305029	Exhaust Diffuser	
30	11-3008B	Screw (M3x8)	
31	305031	Air Inlet	
32	305032	KEY	
33	305033	Keyless Chuck	